

Weatherproof manhole cover SD1, rectangular type



The figure shown here may contain special accessories.

Manhole cover, weatherproof, rectangular in shape, completely made of 1.4307 (AISI 304 L) stainless steel.

Based on DIN 1239:2018-4, suitable for use in Ex zone 1.

The cover is made of 2 mm stainless steel plate, with a centrally raised profile, inner cross bracing for rigidity, self-retracting lock, stainless steel gas assisted spring damper, integrated arrestor which can only be undone by hand; robust, concealed hinges.

A connection for potential equalisation is provided.

The frame consists of a Z-section with a circumferential insect-proof and totally weather-proof rubber seal (frost-proof and weather-resistant), with clips welded to the bottom side, designed for embedding in concrete or for internal bolted fixing.

Manhole cover and frame shielded arc-welded, acid-treated in a pickling bath and passivated.

Operating key included.

Options:


- ▶ 1.4404 (AISI 316 L) stainless steel
- ▶ Air vent DN 150, centrally welded
- ▶ Insulation of the cover, without FCKW
- ▶ Fixing material and foam rubber gasket
- ▶ Safety lock for increased security, with or without profile cylinder
- ▶ Non-standard sizes
- ▶ Possibility to open the cover from below
- ▶ 4 mm cover plate
- ▶ Magnetic contact (cover open/shut indicator)
- ▶ Handle
- ▶ Pollen filter or biofilter (for odour elimination), or wind ventilator within the air vent
- ▶ Separable cover and frame
- ▶ Seal glued to the bottom side of the cover
- ▶ Lacquer according to RAL colour chart
- ▶ Surface made of tear pattern plate
- ▶ Fire-service standard lock, for pillar hydrant key DIN 3223, M 12 (supplied without key)
- ▶ Safety guard / barrier
- ▶ Safety guard / antifall guard
- ▶ Multi-part cover



Weatherproof manhole cover SD1, rectangular type

Subject to technical modification | Drawing no. 50739444, 5.2022

HUBER SE | Industriepark Erasbach A1 | D-92334 Berching | Telefon: +49 8462 201-0 | info@huber.de | www.huber.de

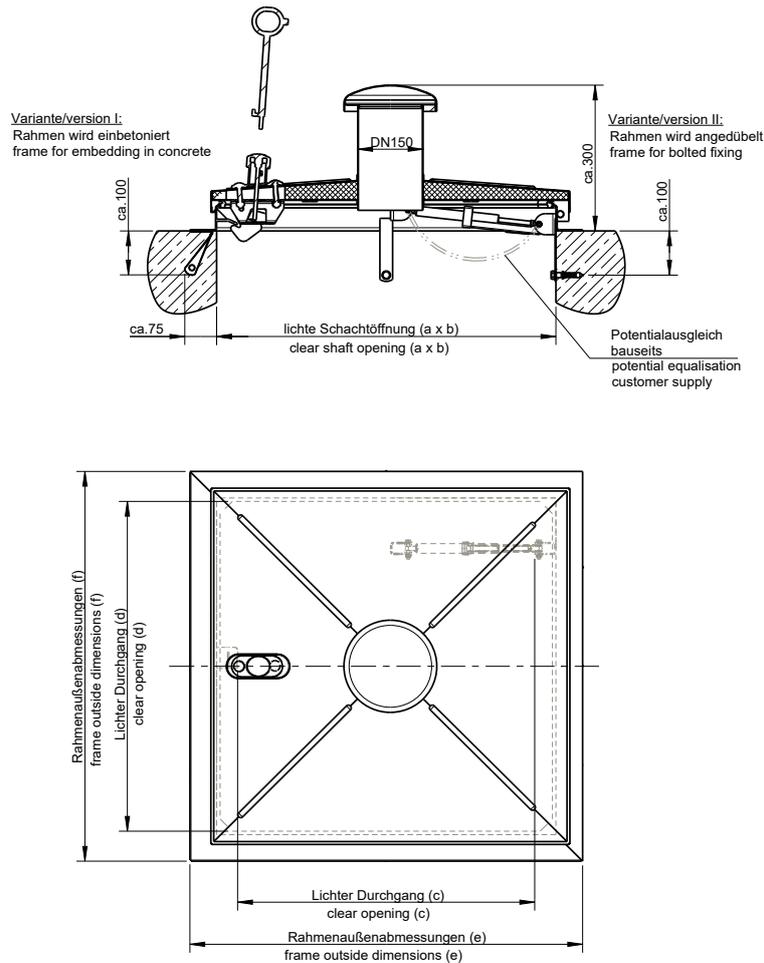

Model	Size a x b	Oder no.	Inside pass c x d	Frame outside dimensions e x f
Standard model	600 x 600	166/G (1)	495 x 565	720 x 720
Standard model	800 x 800	188/G	695 x 765	920 x 920
Standard model	1000 x 1000	111/G	895 x 965	1120 x 1120
With air vent DN 150	600 x 600	166/GD (1)	495 x 565	720 x 720
With air vent DN 150	800 x 800	188/GD	695 x 765	920 x 920
With air vent DN 150	1000 x 1000	111/GD	895 x 965	1120 x 1120
With insulation of cover, without FCKW	600 x 600	166/I (1)	495 x 565	720 x 720
With insulation of cover, without FCKW	800 x 800	188/I	695 x 765	920 x 920
With insulation of cover, without FCKW	1000 x 1000	111/I	895 x 965	1120 x 1120
With air vent DN 150 and insulation of cover, without FCKW	600 x 600	166/ID (1)	495 x 565	720 x 720
With air vent DN 150 and insulation of cover, without FCKW	800 x 800	188/ID	695 x 765	920 x 920
With air vent DN 150 and insulation of cover, without FCKW	1000 x 1000	111/ID	895 x 965	1120 x 1120

Ask for further dimensions. All measurements in mm.

(1) Note: According to German standards GUV-V C5 „Abwassertechnische Anlagen“ and DVGW Arbeitsblatt W122 „Abschlußbauwerke für Brunnen der Wassergewinnung“, the minimum clear width of entrance openings must be 0.8 m.



Weatherproof manhole cover SD1, rectangular type

Subject to technical modification | Drawing no. 50739444, 5.2022