

Data Request Sheet for Doors TT1.1 and TT1.2

Project: _____

Customer: _____ Customer no.: _____

Person in charge: _____ Phone: _____ E-mail: _____

☐ Offer Offer no.: _____ Unit price _____ €,

☐ Order Order no.: _____ Internal base price per unit _____ €, Item: _____, **P** _____

Below you will find our door questionnaire (consisting of four sheets) for the above property. We kindly ask you to fill in the door questionnaire **completely**, confirm the information under point 14 with your signature and return it to us. We would like to point out that the information you provide is a binding part of the contract for the manufacture of the door. The delivery time stated by us begins after the **fully completed** door questionnaire has been returned. **Requested special equipment that is not included in the offer price will only be carried out against payment.**

1. Number of leaves:

☐ Single-leaved door TT1.1

☐ Double-leaved door TT1.2


2. Material:

☐ 1.4307 (AISI 304 L)

☐ 1.4404 (AISI 316 L)

3. Shell dimensions:

(Drawing 1)

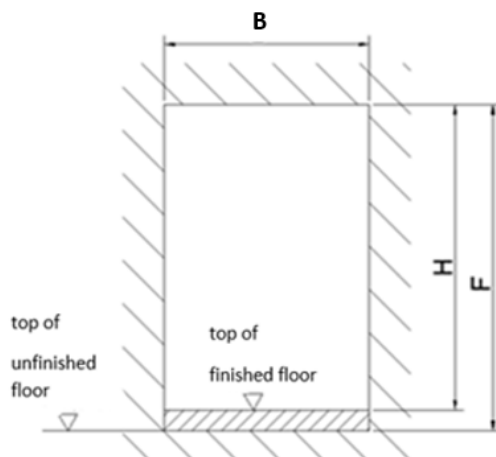

Clear width B = _____ mm

Clear wall opening F = _____ mm

Clear height H = _____ mm

(Please note point 4. sill closure!)

4. Sill closure:

4.1 Standard sill closure:


| | |
|---|--|
| <input type="checkbox"/> step flashing / wall clamps (Drawing 3 b) (BA1) | <input type="checkbox"/> step flashing / bolted with dowels (Drawing 3 g) (BA2) |
| <input type="checkbox"/> non-standard sill, U-profile, sill height: mm (minimal 20mm) (Drawing 3h) (BA6) | |

4.2 Special sill closure (surcharge):


| | |
|--|--|
| <input type="checkbox"/> without step flashing, bolted with dowels (Drawing 3 f) (BA3) | <input type="checkbox"/> circumferential block frame on four sides (Drawing 3i) (BA4) |
| <input type="checkbox"/> circumferential Z-frame on four sides, only RC3 (Drawing 3j) (BA5) | |

5. Installation situation:

- ☐ Installation into the lintel
(Z-frame and block frame possible)
(Drawing 2 a)




- ☐ Installation into ceiling-high clearance
(Only block frame possible!)
(Drawing. 2 b)




6. Door opening options:

Single-leaved TT1.1

- ☐ hinges on left
(Drawing 5 a)




- ☐ hinges on right
(Drawing 5 b)




Double-leaved TT1.2 – position of hinges on swing leaf
(as of 1350 mm the door leaf is divided)

- ☐ hinges on left
(Drawing 5 c)



- ☐ hinges on right
(Drawing 5 d)



Swing leaf


_____ mm
(min. 400 mm / max. 1500 mm)

Fixable leaf


_____ mm
(min 300 mm / max. 1500 mm)

7. Frame and mounting options:


- I.) ☐ Block frame bolted with dowelling clips
(Drawing 4 b)




- III.) ☐ Z-frame bolted with dowelling clips
(Drawing 4 e)



- II.) ☐ Block frame bolted through the frame,
minimum edge distance 80 mm
(Drawing 4 c)



- IV.) ☐ Z-frame bolted through the frame
(Drawing 4 f)



8. Door with rigidly mounted louvre on the outside and fly grid on the inside

Size: 1 pc. W x H = 400 x 200 mm

1 pc. W x H = 500 x 300 mm

Installation position: in the upper section

- | | | |
|--------------------------|----------------------------------|--------------------------|
| <input type="checkbox"/> | inside fly grid only | <input type="checkbox"/> |
| <input type="checkbox"/> | inside fly grid + movable louvre | <input type="checkbox"/> |
| <input type="checkbox"/> | in the lower section | <input type="checkbox"/> |

Double door: in the swing leaf ☐

In the fixable leaf ☐

in both leaves ☐

9. Installation:

☐ by costumer

☐ by HUBER SE

10. Optional equipment:

- | | | |
|--|---|---|
| <input type="checkbox"/> Upper door closer GEZE TS 5000 (door stopper required) | <input type="checkbox"/> swing leaf ≥ 750 mm width | <input type="checkbox"/> fixable leaf ≥ 750 mm width |
| <input type="checkbox"/> Upper door stop manually releasable | <input type="checkbox"/> swing leaf ≥ 750 mm width | <input type="checkbox"/> fixable leaf ≥ 750 mm width |
| <input type="checkbox"/> Lowerable floor seal | | |
| <input type="checkbox"/> One-piece door arrestor (mounted to the door panel), 120 mm lift | <input type="checkbox"/> swing leaf | <input type="checkbox"/> fixable leaf |
| <input type="checkbox"/> Two-piece door arrestor/stop (supplied loose) | <input type="checkbox"/> swing leaf | <input type="checkbox"/> fixable leaf |
| <input type="checkbox"/> Alarm wire insert | | |
| <input type="checkbox"/> Magnetic contact (door OPEN/SHUT indicator) | <input type="checkbox"/> swing leaf | <input type="checkbox"/> fixable leaf |
| <input type="checkbox"/> Lock-bolt contact (door OPEN/SHUT indicator) | | |
| <input type="checkbox"/> Potential equalisation | <input type="checkbox"/> on top of frame | <input type="checkbox"/> on frame bottom |
| <input type="checkbox"/> Heating cable in door frame (without outside temperature sensor, without controls) (HEIZ) | <input type="checkbox"/> in door frame | <input type="checkbox"/> in door panel |
| <input type="checkbox"/> Block frame insulation | | |
| <input type="checkbox"/> No profile cylinder on the inside, the door panel is continuous (single profile cylinder / half cylinder) | | |
| <input type="checkbox"/> Paint RAL colour _____ (RAL...) | <input type="checkbox"/> outside | <input type="checkbox"/> inside |
| <input type="checkbox"/> Additional anti-graffiti lacquer (RAL...) | <input type="checkbox"/> outside | <input type="checkbox"/> inside |
| <input type="checkbox"/> Standard lock | <input type="checkbox"/> button outside, handle inside | <input type="checkbox"/> handles on both sides |
| <input type="checkbox"/> Panic lock | <input type="checkbox"/> button outside, handle inside | <input type="checkbox"/> handles on both sides |
| <input type="checkbox"/> Lock for two profile cylinders | <input type="checkbox"/> button outside, handle inside | <input type="checkbox"/> handles on both sides |
| <input type="checkbox"/> Stainless steel lock (for water chamber) | <input type="checkbox"/> button outside, handle inside | <input type="checkbox"/> handles on both sides |
| → only one profile cylinder possible! No anti-panic function! | | |
| <input type="checkbox"/> Steel sheet finish | | |
| <input type="checkbox"/> Wood panel, wood type: _____ (HOLZ) | <input type="checkbox"/> outside | <input type="checkbox"/> inside |

Info: In case of sunlight, the operability may be impaired. In these cases, we recommend a steel sheet finish or wood panel. (see special equipment).

11. Other accessories:

12. Delivery address (complete with post code and city)

(If the door is supplied directly onto a site, indicate the available unloading times and contact persons on site.)

13. Customer's confirmation:

Customer's representative: _____ Date: _____ Signature: _____

14. Please return this form to:

HUBER contact person: _____ Phone. Nr. +498462/201- Fax. Nr. +498462/201-399

E-Mail: _____@huber.de

15. Enclosures for the design engineers:

- ☐ Drawing ☐ Photo ☐